



Retrofitting of RC Element Beam

Prof. Anandrao Jadhav^{1*}, Prof. Achyut Deshmukh^{2*}, Ms. Shradha M. Kalburgi³

Assistant Professor^{1*}, Assistant Professor^{2*}, PG Structure Student³

Department of Civil Engineering

MIT ADT UNIVERSITY, PUNE, INDIA.

Email Id: ^{1*}anandrao.jadhav@mituniversity.edu.in, ^{2*}achyut.deshmukh@mituniversity.edu.in, ³shradhakalburgi51@gmail.com

Abstract - Structures with the passing of time they lose their strength because of many reasons like seismic activity, soil failure due to ground motion, arises problem like damaging of roof, foundation, walls, pillars, column and beams for these structures becomes statically unsafe and solution to these problem is Retrofitting. The structure performs normally during their life span but at the end of design period of structure, the structure may not be capable of taking load. Enhancement of performance of such buildings can be done by increasing strength and strength of building can be increased by process of Retrofitting. RCC buildings undergo three different R's name as Repair, Rehabilitation and Retrofitting. Experimental investigations on the flexural behaviour of RC beams strengthened using carbon fibre reinforced polymer (CFRP) fabrics are carried out. Externally reinforced concrete beams with epoxy-bonded CFRP sheets were tested to failure using a point load concentrated static loading system. The effect of CFRP fabric and its orientation technique on ultimate load carrying capacity and failure mode of the beams are investigated. A finite element model that is made by using ABAQUS software is used for the simulation of experiments and model gave compatible results with experiments.

Keywords – Retrofitting of Beam, CFRP, ABAQUS

INTRODUCTION

Retrofitting is defined as the process of modification of existing structures like buildings, bridges to make more resistant to seismic activity and other natural calamities. Structures with the passing of time they lose their strength because of many reasons like seismic activity, soil failure due to ground motion, arises problem like damaging of roof, foundation, walls, pillars, column and beams for these structures becomes statically unsafe and solution to these problem is Retrofitting. The structure performs normally during their life span but at the end of design period of structure, the structure may not be capable of taking load. Strengthening with Fiber Reinforced Polymers (FRP) composite materials in the form of external reinforcement is of great interest to the civil engineering community. The conventional strengthening methods of RCC structures attempt to compensate the lost strength by adding more material around the existing sections. The strengthening of concrete structures with externally bonded reinforcement is

generally done by using either steel plates or Fiber Reinforced Polymer (FRP) Enhancement of performance of such buildings can be done by increasing strength and strength of building can be increased by process of Retrofitting. RCC buildings undergo three different R's name as Repair, Rehabilitation and Retrofitting. Repair is partial improvement of the degraded strength of a building after an earthquake.

Rehabilitation is a functional improvement, where Retrofitting means structural strengthening and enhancement of performance of deficient structural elements of a building to a pre-defined performance level whether or not an earthquake has occurred. **Repairs** the main purpose of repairs is to bring back the architectural shape of the building so that all services start working and the functioning of building is resumed quickly. Repair does not pretend to improve the structural strength of the building and can be very deceptive for meeting the strength requirements of the next earthquake. The actions will include the following:

- Patching up of defects such as cracks and fall of plaster.
- Repairing doors, windows, replacement of glass panes.
- Checking and repairing electric wiring.

Restoration This type of action must be undertaken when there is evidence that the structural damage can be attributed to exceptional phenomena that are not likely to happen again and that the original strength provides an adequate level of safety.

The main purpose of restoration is to carry out structural repairs to load bearing elements. It may involve cutting portions of the elements and rebuilding them or simply adding more structural material so that the original strength is more or less restored.

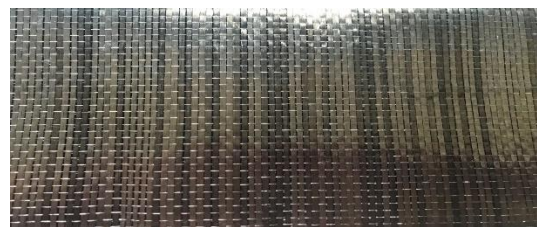


Figure 1 CFRP



Carbon Fiber Reinforced Polymer (CFRP) is an advanced non-metallic composite material made of a polymer resin reinforced with carbon fibers. It has many superior performances, such as high strength, lightweight, no corrosion and high fatigue resistance. Carbon fiber reinforced polymers are one the stiffest and lightest composite materials, they are much substantial than other conventional materials in many fields of applications. At present CFRP is being used for structural repair for damage structure for development of aircraft fuselage, automobile chassis, wind turbines (CFRP) materials have become increasingly popular in industry applications. It can be largely endorsed to the superior properties of CFRP, such as high strength-to-weight ratio, corrosion resistance and improved fatigue performance.

Table No 1: Mix design M25

Grade of concrete	Material	Quantity (Kg / M ³)
M25 (1:1.88:2.82) (w/c ratio = 0.40)	Cement	394.325 Kg
	Coarse aggregate	1112.74 Kg
	Fine aggregate	742.02 Kg
	Water	157.73Litres

Table 2 Properties of CFRP

Type of fiber	Carbon Fiber
Fiber orientation	Unidirectional
Weight of fiber	400 g/mm ²
Density of fiber	1.80 g/cc
Fiber thickness	0.3 mm
Ultimate elongation (%)	1.5
Tensile strength	3400 N/mm ²
Tensile modulus	2300000 N/mm ²

Application of CFRP by Dry Application Method.

Cleaning

Clean all the tools and application equipment with immediately after use. Any uncured epoxy should be wiped up with a clean wetted with turpentine. Hardened material can only be removed mechanically.

Preparation

Review the project specifications and requirement in detail Obtain all of the necessary equipment and tools plus material required

Repairs to concrete surface irregularities such as blowholes or voids must be made with a suitable repair mortar The concrete surface must be brushed and air blasted to

achieve a dust free condition and no loose particles should be present on surface.

Dry application process

The name of the dry application method comes from the state of fabric at the time it is applied inn its final position. For this process, sikadur-330 is normally used both as the substrate primer and as the fabric impregnating resin.

The dry application method is suitable for woven fabrics with an area weight of up to 430 g/m², dependent on the fiber type.

For the dry application of the CFRP sheet sikadur-330 is normally used for the resin priming coat and as the impregnating resin.

It is shorter at high temperatures and longer at low temperatures.

The greater the quantity is mixed, the shorter the pot life becomes. To obtain longer workability ay high temperatures, the mixed adhesive may be divided into portions. Another method is chill components A and B before mixing them.

The actual consumption, especially of the priming layer, is primarily dependent on the roughness of the substrate and the type and amount of FRP sheets to be impregnated.

Testing of beam specimen

- 28 days cured specimen were tested on universal testing machine at Nikhil Construction, Pune
- Among 12 beam specimen 3 beam are tested for maximum load capacity
- Remaining 9 beams are distressed by 60% of average ultimate load capacity of 3 control beam.
- Three beams are wrapped completely by CFRP, three are wrapped at middle and three are wrapped at bottom.

Comparison of Retrofitted beams and without retrofitted beams using CFRP from strength point of views.

- Beam wrapped completely sheet shows greater load carrying capacity than other beams.
- The ultimate load obtained for control beam is 75KN, completely wrapped beam has an ultimate load of 114.5KN, middle wrapped beam has an ultimate load of 104.93KN, bottom wrapped beam has an ultimate load of 89.98KN.
- Completely wrapped beam carries maximum load compared to other specimens



Figure 2 Beam wrapped completely



Figure 3 Beam wrapped Middle



Figure 4 Beam wrapped Bottom



Figure 5 De-Bonding Failure

Overall Results

Technique	Load Carrying Capacity (KN)	Flexural Strength (N/mm ²)
Without Wrapping	75	23.33
Wrapped Completely	114.5	35.62
Wrapped at Middle	104.93	32.64
Wrapped at Bottom	89.98	23.20

Analysis of Beam on ABAQUS software

The results obtained from analysis were the stress carrying capacity of beam with CFRP increased 10-15% by wrapping the sheet at the bottom side of beam. The maximum stress without CFRP of beam obtained as 19.7 Mpa and maximum stress with CFRP was 27.4 Mpa.

The discretization is done for the clear representation of the contour. Stress contour and deflection are shown comparing the top to bottom side, figure shows that the total displacement of beam reduced by application of CFRP sheet.

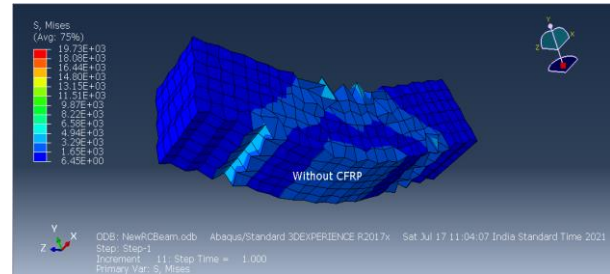


Figure 7 Beam Without CFRP

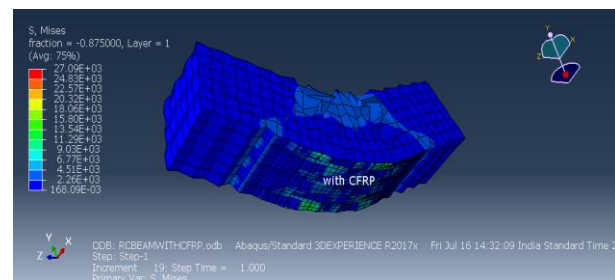


Figure 8 Beam with CFRP

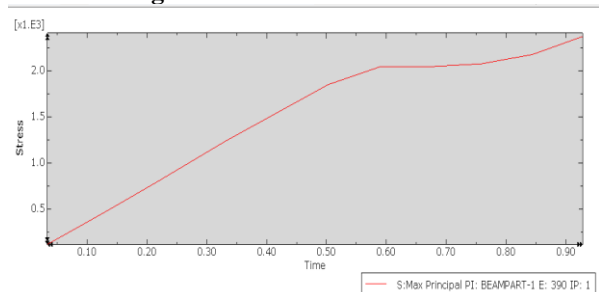


Figure 9 Control Beam Stress vs Time curve

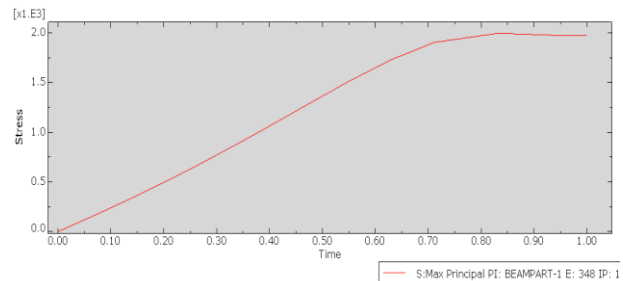


Figure 10 Beam with CFRP Result

From the above curves the stress vs time, without wrapping the CFRP with increment of time the stress carrying capacity of retrofitted beam shows more as compared to non-retrofitted beam.

The variation of curve is linear up to some point in first curve that is stress carrying capacity with respect to time is not more as compared to results obtained in second curve that is beam retrofitted with CFRP.



ACKNOWLEDGMENT

I WOULD LIKE TO EXPRESS MY SINCERE GRATITUDE TO ALL THE AUTHORS FOR A VALUABLE HELP RECEIVED FOR COMPLETING THIS RESEARCH PAPER.

REFERENCES

1. 'Retrofitting of Reinforced Concrete beams using CFRP Sheets: A Review' (2020), Gurpreet Singh Asst. Professor, Dept. of Civil Engineering, Chandigarh University, Punjab, India. International Research Journal of Engineering and Technology (IRJET) Volume: 07 Issue: 05.
2. 'Finite Element Modelling of RCC beam using ABAQUS' (2020), T.S. Vishnu Kumar, N. Rushwanth Chowdary. Academic Consultant, Dept. of Civil Engineering, SV University College of Engineering, Tirupati. IJCRT | Volume 8, Issue 7 July 2020 | ISSN: 2320-2882
3. 'Retrofitting of Concrete Structure with Fibre Reinforced Polymer' (2018), Ankit Dasgupta M. Tech. Scholar Department of Civil Engineering KIIT University, Bhubaneswar, Odisha, India.
4. 'Retrofitting of reinforced concrete beams by using carbon fibre reinforced polymer sheets' (2018), Mansoor Ahmad Bhat M.Tech. Student, Department of Civil Engineering/Chandigarh University, Gharuan, Mohali Chandigarh Punjab. International Journal of Civil Engineering and Technology (IJCET) Volume 9, Issue 9,
5. 'Seismic Retrofitting Schemes for RC- Structures by FRP materials' (2018), Thendral sundararasan, Arunya.A, Assistant Professor, Department of Civil Engineering, BIST, BIHER, Bharath University.
6. 'Repair, Restoration and Strengthening of Building' (2017), prof. U. L. Deshpande Assistant Professor, Applied Mechanics Departments, Government college of Engineering, Karad, India.
7. 'Maintenance of RCC Beams by Retrofitting Technique using steel plates' (2017), Department of Civil Engineering Suyash Institute of Information and Technology, Gorakhpur, India Village Hardi Post Jamui Pandit Maharajgang International Research Journal of Engineering and Technology (IRJET) Volume: 04 Issue.
8. 'Repair, Rehabilitation & Retrofitting of RCC for Sustainable Development with case studies' (2016), J. Bhattacharjee Prof.& Advisor, Department of Civil Engineering, Amity University, Noida, UP, India; former Chief Engineer & Jt. Director General, (MES/MOD) Civil Engineering and Urban Planning: An International Journal (CiVEJ) Vol.3, No.2.
9. 'Study on the Performance of Retrofitting Techniques in RCC Beams' (2016), Prof. Shibi Varghese, Binusha Majeed, Habeebullah R, Mitin Mathew, Shabida K K Associate. Professor, Dept. of Civil Engineering, M. A. College of Engineering, Kothamangalam, Kerala, India 2B.Tech. Students, Dept of Civil Engineering, M. A. College of Engineering, Kothamangalam, Kerala, India, International Research Journal of Engineering and Technology (IRJET) Volume: 03 Issue: 06.
10. 'Review Paper on Retrofitting of RCC Beam Column Joint Using Ferro cement'(2016), Charu Gupta, Abhishek Kumar, Mohd. Afaque Khan International Research Journal of Engineering and Technology (IRJET) Volume: 03 Issue: 03.
11. 'Numerical Modelling of Retrofitted Reinforced Concrete Building Frames'(2016)J.O. Afolayan, O.E. Babalola, P.O. Awoyera, A.W. Adekeye and F.A. Ishola Department of Civil Engineering, Federal University of Technology, Akure, Nigeria Research Journal of Applied Sciences, Engineering and Technology 12(2): 206-213, 2016 ISSN:2040-7459; e-ISSN: 2040-7467
12. 'Study on Retrofitted R.C.C. Building by Different NDT Methods' (2015), Nikhil L. Jagtap, Prof. P.R. Mehetre IOSR Journal of Mechanical and Civil Engineering (IOSR- JMCE) e-ISSN: 2278-1684, p-ISSN: 2320-334X, Volume 12, Issue 3 Ver. I.
13. 'Retrofitting of Reinforced Concrete Beam with Externally Bonded CFRP' (2015), J. Gopi Krishna, M. Tech Student Department of Civil Engineering Universal College of Engineering Technology, Guntur, IJRST –International Journal for Innovative Research in Science & Technology| Volume 2 | Issue 07.
14. 'Analysis of RCC Beams using ABAQUS' (2015), T. Tejaswini PG Student, Dept. of Civil Engineering CBIT, Hyderabad, Telangana, India Dr.M.V. Rama Raju Assoc. Professor, Dept. Of Civil Engineering CBIT, Hyderabad, Telangana, India, International Journal of Innovations in Engineering and Technology (IJET)
15. 'Materials and Jacketing Technique for Retrofitting of Structures' (2015) Shri. Pravin B. Waghmare International Journal of Advanced Engineering Research and Studies.
16. 'Retrofitting of RC Beams Using FRP' (2013), Asst. Prof. Anumol Raju, International Journal of Engineering Research & Technology (IJERT) Vol. 2 Issue 1, January- 2013 ISSN: 2278-0181
17. 'Seismic Behaviour of FRP Reinforced Concrete Frame Buildings' (2008), S. Cimilli Erkmen and M. Saatcioglu The 14 th World Conference on Earthquake Engineering Beijing, China.